


**Medium-duty overhead holder and stop  
for interior doors,  
single acting**

**3300 ADJ SERIES  
SURFACE MOUNTED**

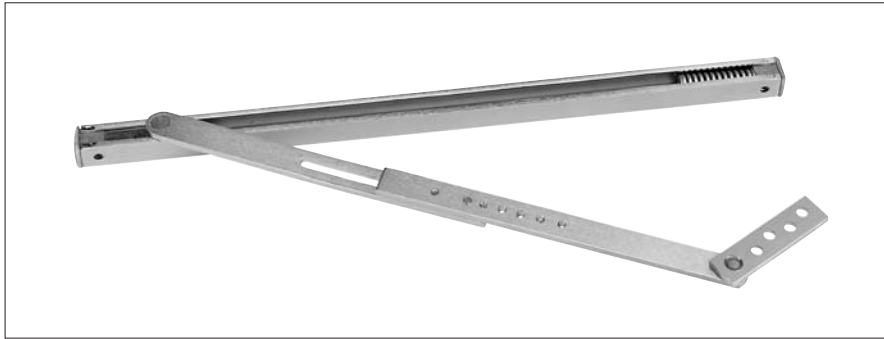

Patent No. 5,381,628

**STANDARD FEATURES**

- For All Stainless Steel Components - Prefix N
- Non-handed/reversible
- Single point hold-open is field adjustable from 85° to 110°
- Automatic hold-open and release by push and pull on door
- Friction holder can be adjusted easily on site at any position and held under adjustable pressure
- Maximum opening 110°, minimum door thickness 1 3/8"
- Wood, machine screws and sex bolts included
- Available in all BHMA plated and sprayed finishes

**All Stops  
Warnock Hersey  
listed**

**WHEN ORDERING,  
please list:**

Model number

Door closer number or other hardware

Mounting means of the door and butt size

Hold-open or dead-stop degree

Door opening and thickness

Finish

**SPECIFICATIONS:**

**Stop only function to be Warnock Hersey listed as manufactured by ABH.**

3310A Series hold-open mechanism with sliding block will release or engage door by push or pull; 3330A Series friction holder has non-abrasive brake lining 2 1/4" or longer; steel shock absorbing spring

**Material:**

brass/stainless steel/steel; channel 1/16" thick and 3/4" wide; arm 3/16" thick and 3/4" wide; jamb bracket 3/16" thick and 3/4" wide; sliding block 9/16" wide and 1/16" thick. **Hold-open mechanism can be disengaged to function as stop only.**

DOOR FRAME OPENING	HOLDER NUMBER		
BUTTS OFFSET PIVOTS	HOLD- OPEN	STOP	FRICTION
24" - 29 15/16"	3311A	3321A	3331A
30" - 35 15/16"	3312A	3322A	3332A
36" - 42"	3313A	3323A	3333A

Contact ABH for special templating or other door opening  
Average weight/unit 1 3/4 lbs.

**www.abhmfg.com**  
**E-mail: abhinfo@abhmfg.com**  
**Architectural Builders Hardware Mfg., Inc.**  
1222 Ardmore Ave., Itasca, IL 60143  
**630.875.9900; FAX 800.9FAXABH (932.9224)**

© 2007 ABH Mfg., Inc.  
Printed in USA 04/07

