




# 6600EO-6700EO EXIT ONLY FOR MORTISE LOCK

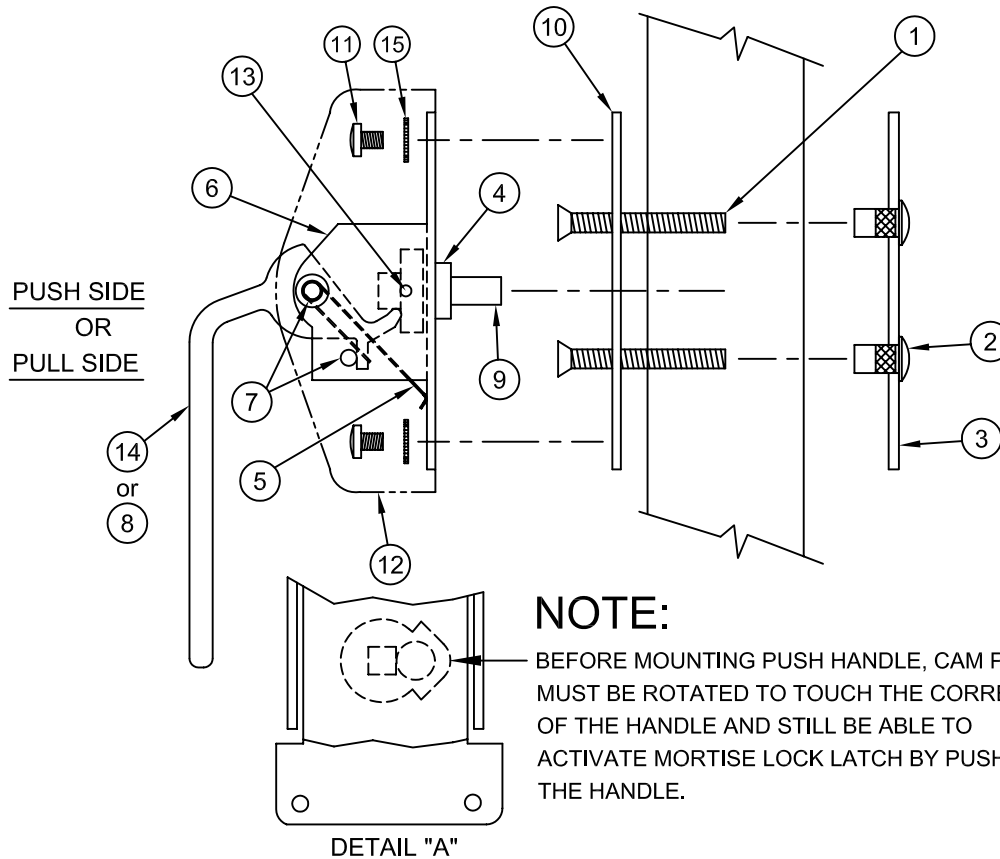

6600EO C  US LISTED

6700EO C  US CLASSIFIED

## NOTE:

BEFORE MOUNTING PUSH HANDLE, CAM PIN MUST BE ROTATED TO TOUCH THE CORRECT END OF THE HANDLE AND STILL BE ABLE TO ACTIVATE MORTISE LOCK LATCH BY PUSHING ON THE HANDLE.

ITEM	QTY	PART	ITEM	QTY	PART
1	2	12-24 X 1-7/8" F.H.M.S.	9	1	CAM ASSEMBLY (MALE)
2	2	12-24x1/2L,5/16 O.D. SEX BOLT	10	1	ADAPTER PLATE
3	1	EXIT ONLY PLATE	11	4	10-32x1/4L" PAN HD. M.S.
4	1EA	WASHERS & C-RING	12	1	COVER
5	1	SPRING	13	2	8-32 X 3/8" F.H.M.S.
6	1	MOUNTING BRACKET	14	1	PUSH SIDE HANDLE
7	2EA	HANDLE SHAFT & COTTER PIN	15		
8	1	PULL SIDE HANDLE	16		

## NOTES:

- 6700EO SERIES - INSTALL MORTISE LOCK PER OTHER MANUFACTURER'S INSTRUCTIONS.  
FOR RETROFIT APPLICATION - VERIFY EXISTING TRIM IS THRU-BOLTED.  
6600EO SERIES - INSTALL MORTISE LOCK PER ABH DOOR PREP INSTRUCTIONS.
- BEFORE MOUNTING ADAPTER PLATE (ITEM 10) & EXIT ONLY PLATE (ITEM 3), DETERMINE WHICH SIDE OF THE DOOR WILL RECEIVE THE PUSH OR PULL HANDLES (ITEM 8 OR 14) AND THE DIRECTION THE HANDLES WILL MOUNT. HANDLE CAN BE MOUNTED UP, DOWN OR HORIZONTALLY.
- MOUNT ADAPTER PLATE (ITEM 10) & EXIT ONLY PLATE (ITEM 3) TO DOOR WITH (2) 12-24 X 1-7/8" F.H.M.S. (ITEM 1) THRU DOOR AND MORTISE LOCK TO (2) 12-24x1/2L SEX BOLT (ITEM 2). TIGHTEN SECURELY.
- BEFORE MOUNTING BRACKET (ITEM 6) INSTALLATION, CAM PIN MUST BE ROTATED TOWARDS THE CORRECT SIDE OF THE HANDLE (SEE DETAIL A).
- MOUNT MOUNTING BRACKET (ITEM 6) TO ADAPTER PLATE (ITEM 10) WITH (4) 10-32 X 1/4" PAN HD M.S. (ITEM 11) WITH (4) STAR WASHERS (ITEM 15).
- MOUNT COVER (ITEM 12) WITH (2) 8-32 X 3/8" F.H.M.S. (ITEM 13).

PATENT No. 6,196,599 & 5,730,478



® www.abhmfg.com  
E-mail: abhinfo@abhmfg.com  
Architectural Builders Hardware Mfg., Inc.  
1222 Ardmore Ave., Itasca, IL 60143  
630.875.9900; FAX 800.9FAXABH (932.9224)

© 2007 ABH Mfg., Inc.  
printed in USA

6600EO-6700EO-01.DWG

6600EO  
6700EO

REVISED 04-30-07