

Hospital Push/Pull Latches




6600 Series Trim with Mortise Lock Body

Innovation, Quality,
Customer Service...

Standard Features

- Mortise lock body provided – specify function (see page C-16 to C-17 for details)
- Mortise lock body only available in 2-3/4" backset
- 4-7/8" ASA strike supplied standard
- 3/4" latch bolt throw
- Mortise lock cylinder and cam not provided
 - Uses clover leaf-type cam – Best® C258 or equal (except 6638 and 6645 models, which use Best® C293 or equal on outside)
 - 6 Pin Cylinder = 1-1/8" long
 - 7 Pin Cylinder = 1-1/4" long
- 1-3/4" standard door thickness minimum (specify if greater than 1-3/4")
- Meets ADA requirements
- All mounting hardware goes through mortise lock body prep – no additional prep required
- One continuous spring provides a smoother operation and an extended life for the unit
- Trim is non-handed; however, the mortise lock body is handed (can be changed in field)
- Can be mounted vertical or horizontal (with handles pointing toward hinge edge of door)
 - For mortise lock functions where thumb turn or cylinder will be used, either mount the trim horizontal or select "J" option (Junior Covers) to achieve required clearance
- Handles can be mounted up or down by simply rotating trim 180°
- UL Listed in U.S.A and Canada for use on door fire rated 90 minutes or less, up to 4'0" x 8'0"
- Patent# 5,730,478 & #6,196,599

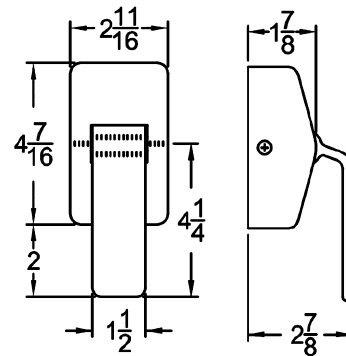

How to Order:

Example: 6610 LH - US32D - AM

Model: _____

- | | | |
|--------------------------|------------------------|--------------------|
| • 6610 = Passage | • 6641 = Institutional | • 6656 = Classroom |
| • 6632 = Privacy | • 6645 = Hotel | • 6658 = Storeroom |
| • 6637 = Communicating | • 6653 = Dormitory | |
| • 6638 = Public Entrance | • 6654 = Entry/Office | |

Lock Body Handing: _____

- | | |
|-------------------|---------------------------|
| • LH = Left Hand | • LR = Left Hand Reverse |
| • RH = Right Hand | • RR = Right Hand Reverse |

Finish: _____

- | | | | |
|---------|--------|---------|-------|
| • US32D | • US32 | • US10B | • US3 |
| • US26D | • US26 | • US10 | • US4 |

Options, if Needed: _____

- H • AM • L • PL • PS • EX • X • J • RC • SEC • THICK
• EL • EU • RX • AB • PLA • P (See pages C-3 to C-5 for details)

*Brand names are trademarks or registered trademarks of their respective companies.



Architectural Builders Hardware Manufacturing, Inc.
1222 Ardmore Avenue, Itasca, IL 60143
Tel: 630-875-9900 • Fax: 630-875-9918 / 800-932-9224
Web: www.abhmfg.com • Email: abhinfo@abhmfg.com