


A548 - Three-Sided with Astragal

Standard Features


- Integral astragal provides additional security by protecting the latch from intruders or vandalism
- .050" material thickness - 304 stainless steel
- Finishes available - US32D, US32, US10*, US10B*, US3* and US4*
- Fasteners provided - #6 x 5/8" Phillips flat head, undercut sheet metal screws
- Specify any length up to 120"
- For use on 1-3/4" door
- Specify handing and either active or inactive door when ordering

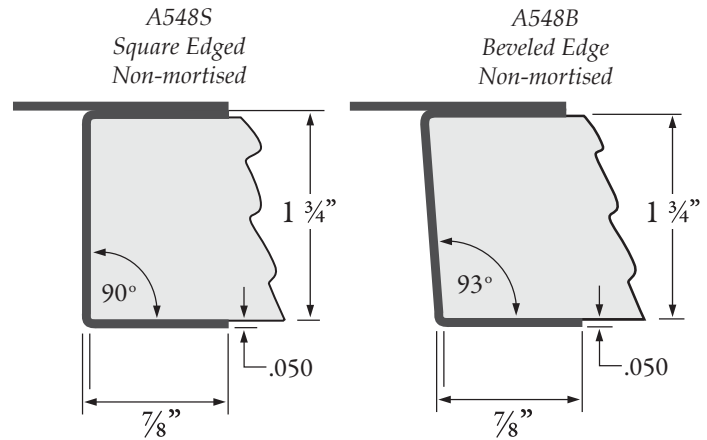

Fire Rating

ABH edge guards come standard UL fire rated for use on:

- Wood or plastic-covered wood composite fire doors rated up to and including 1-1/2 hours
- Hollow metal, steel-covered, composite type fire doors rated up to and including 3 hours

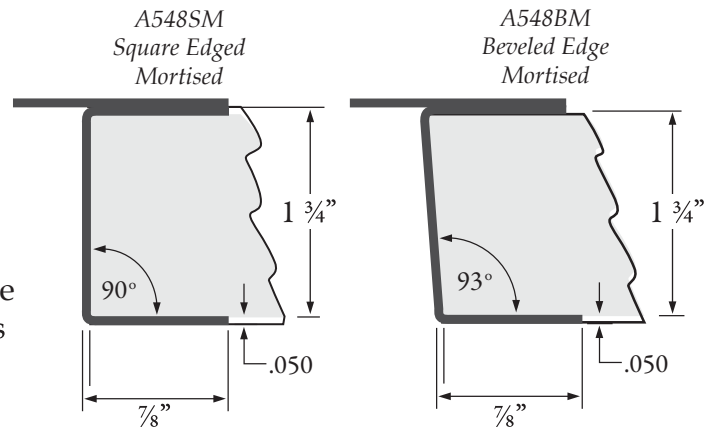

Options

- **Cut-Outs** - ABH offers numerous cut-outs for door hardware - see page H-5 and H-6 for details. Contact factory for custom cut-outs.
- **LL** - Lead Lined Astragal
- **AS** - Adjustable Studs allow for up to 3/8" alignment correction
- **SEC** - Security fasteners
- Custom leg sizes available
- Custom door thicknesses available

*These finishes only available in 42" or smaller

