

Double-Lipped Strike & Rescue Stop Combos Flipper Style


Innovation, Quality,
Customer Service...

Standard Features

- Intended for use in hospital or nursing home patient bathroom doors
- Allows door to open in both directions without damaging the frame after manually pushing the rescue stop into the frame
- Stop automatically returns to projected position when released
- Door to be mounted on center hung pivot set – ABH 0327, 0127, 0128 or 0370 (see pivot section for details)
- For use on 1-3/4" thick doors - center hung or 1/8" inset
- Cut-out is standard for cylindrical latches. Custom units available for mortise locks (see pages J-19 to J-23)
- Standard frame sizes are 5-3/4" and 6-3/4". Custom frame sizes available (see pages J-18 to J-23)
- Supplied with 8-32 x 3/8" undercut machine screws
- .074" thick stainless steel material
- Available in US32D, US32, US10B, US10, US3 and US4 finishes – Contact factory for custom finish
- Meets and/or exceeds ANSI Standard A1882



Center Hung Door - Cylindrical Latch
CR4591 - 5-3/4" Frame
CR4592 - 6-3/4" Frame

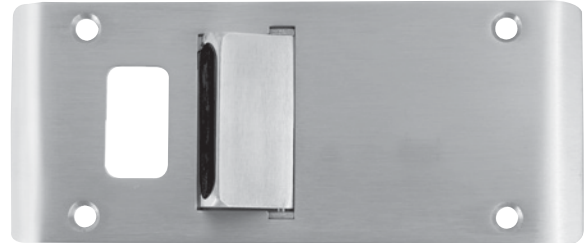

1/8" Inset Door - Cylindrical Latch
CR4594 - 5-3/4" Frame
CR4593 - 6-3/4" Frame

Model Number	Frame Size	Strike Height	Latch Type	Door Inset
CR4591	5-3/4"	2-3/4"	Cylindrical	Center Hung
CR4592	6-3/4"	2-3/4"	Cylindrical	Center Hung
CR4594	5-3/4"	2-3/4"	Cylindrical	1/8" Inset
CR4593	6-3/4"	2-3/4"	Cylindrical	1/8" Inset

