
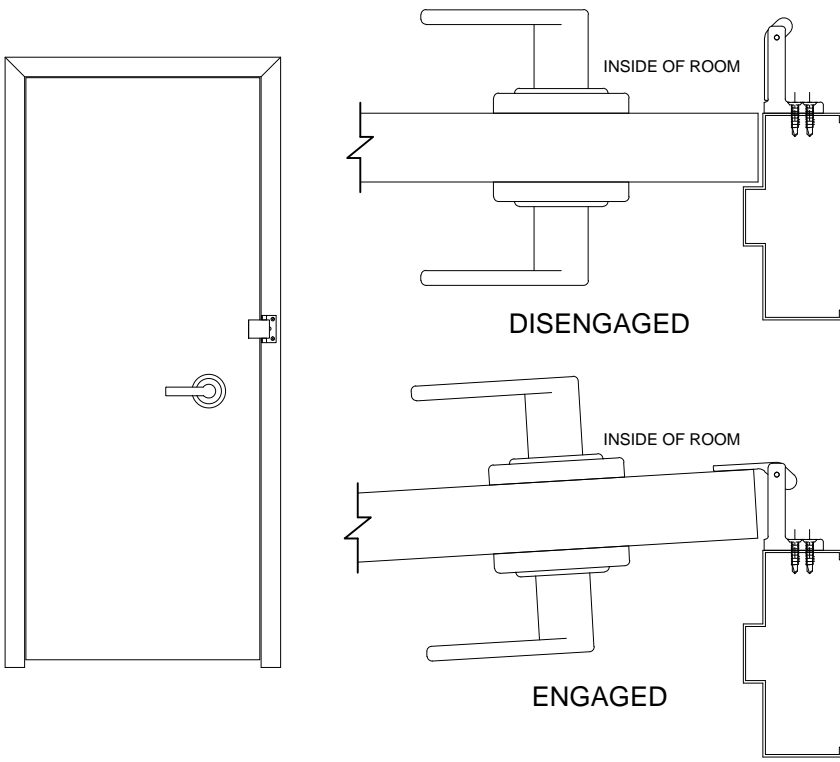


18607 PRIVACY DOOR LATCH

- ADA COMPLIANT
- ENHANCED IN-ROOM PRIVACY
- EASY TO INSTALL
- FOR USE WITH CLASSIFIED FIRE DOORS - HOLLOW METAL STEEL COMPOSITE TYPE FIRE DOORS RATED UP TO AND INCLUDING 3 HRS, WOOD COMPOSITE TYPE FIRE DOORS RATED UP TO INCLUDING 1-1/2 HRS. AND 20 MINUTES WITHOUT HOSE STREAM.

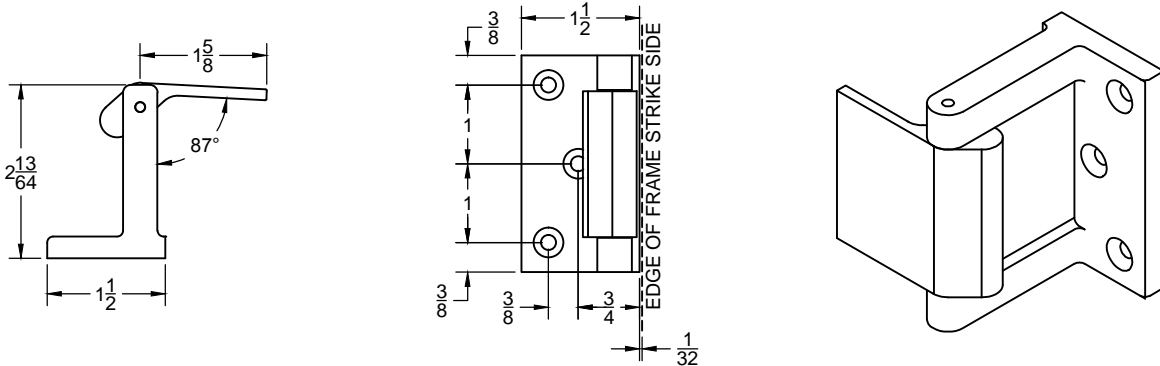

1. DETERMINE MOUNTING HEIGHT.
2. USE THE LATCH AS THE TEMPLATE AND SCRIBE THE MOUNTING HOLES.
3. CENTER PUNCH AND DRILL 5/32" PILOT HOLES WHERE INDICATED.
4. MOUNT THE LATCH ON THE DOOR FRAME WITH THE FASTENERS PROVIDED.
5. CHECK PRODUCT PERFORMANCE BY EXTENDING THE PDL LIP AFTER THE DOOR IS CLOSED.
6. CLOSE THE DOOR AND PUSH THE PDL TO THE DISENGAGED POSITION. THE DOOR SHOULD OPEN FREELY.

AVAILABLE FINISHES:
 US4 - SATIN BRASS
 US10B - SATIN DARK BRONZE
 US26D - SATIN CHROME
 S1 - PAINTED ALUMINUM
 BLACK POWDER COAT

SCREW DETAIL	
10-24 x 7/8" PHILLIPS FLAT HEAD, UNDERCUT, SELF-DRILLING TEK MACHINE SCREW	3
#10 x 1-1/4" PHILLIPS FLAT HEAD, UNDERCUT, SHEET METAL SCREW	3

18607 PRIVACY DOOR LATCH-00.DWG